

INVENTORY

- A. LADDER x2
- B. LEGS x4
- C. TWIRLY WHIRLY x8
- D. RUNG x13
- F. SWING BAR 3M x1
- F. SWING LEG 2.3M x2
- I. ELBOW x6
- J. TEE x10
- K. BASE PLATE x10
- L. BOLT x28
- M. PEG x10
- N. 5MM ALLEN KEY x1
- O. 8MM ALLEN KEY x1
- P. PLASTIC CAP x4
- Q. HEX BIT x1
- R. MANUFACTURING STICKER x1
- S. HEIGHT MARK STICKER x4
- X. SWING HOOK x4

1. LEG ASSEMBLY

- ① STICK HEIGHT MARKER STICKER ONTO LEG (FINAL LOCATION AS SHOWN)
- ② INSERT PLASTIC CAP ONTO ENDS OF LEGS WITH A Mallet
- ③ LAY DOWN LEG ON A FLAT SURFACE AND INSERT RUNGS IN HOLES
- ④ INSERT BOLTS AND HAND TIGHTEN
- ⑤ ADD SECOND LEG, INSERT BOLTS AND FULLY TIGHTEN WITH 5MM ALLEN KEY
- ⑥ INSERT BASE PLATES INTO EACH LEG
- ⑦ FULLY TIGHTEN WITH 8MM ALLEN KEY
- ⑧ REPEAT STEPS 1-7 TO CREATE SECOND PAIR OF LEGS. THEN GENTLY SLIDE ON TEES TO REST ON TOP OF TOP RUNG
- ⑨ GENTLY TIGHTEN IN PLACE TO STOP MOVING
- ⑩ SLIDE ON TEES TO THE APPROPRIATE HEIGHT MARKS AND TIGHTEN WITH 8MM ALLEN KEY
- ⑪ REPEAT STEPS 9-10 FOR SECOND PAIR OF LEGS

2. LADDER ASSEMBLY

- ① LAY PIECES ON A FLAT SURFACE AND INSERT RUNGS INTO FIRST LADDER BAR. INSERT AND HAND TIGHTEN BOLTS.
- ② SLIDE SECOND LADDER BAR INTO PLACE AND INSERT AND HAND TIGHTEN BOLTS.
- ③ TURN COMPLETED LADDER ON ITS SIDE, ENSURING IT'S SQUARE AND TIGHTEN ALL BOLTS WITH 5MM ALLEN KEY. REPEAT ON OTHER SIDE

3. TWIRLY WHIRLY ASSEMBLY


1. INSERT BASE PLATE ONTO TWIRLY WHIRLY BAR POLE (900mm) & TIGHTEN
2. INSERT ELBOW ONTO TOP OF THE POLE & TIGHTEN
3. INSERT VERTICAL TWIRLY WHIRLY BAR POLE ALL THE WAY INTO THE ELBOW UNTIL THE HORIZONTAL POLE HITS THE

ENSURE VERTICAL POLE IS INSERTED INTO THE ELBOW ALL THE WAY UNTIL IT CAN GO NO FURTHER


REPEAT ABOVE STEPS FOR THE OTHER THREE TWIRLY WHIRLY BARS

TURN OVER FOR INSTALLATION INSTRUCTIONS


INSTALLATION INSTRUCTIONS

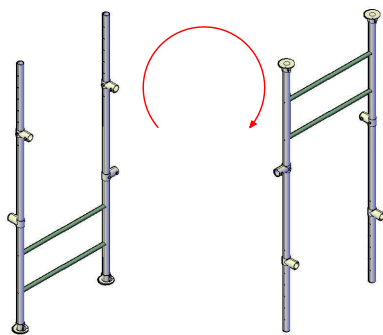


Turn one set of legs upside down

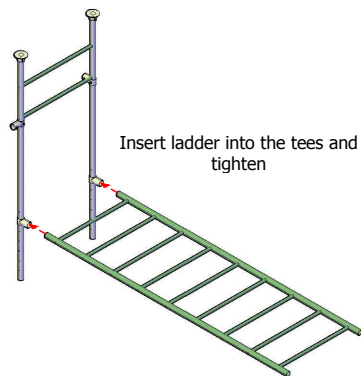


Insert ladder into the tees and tighten

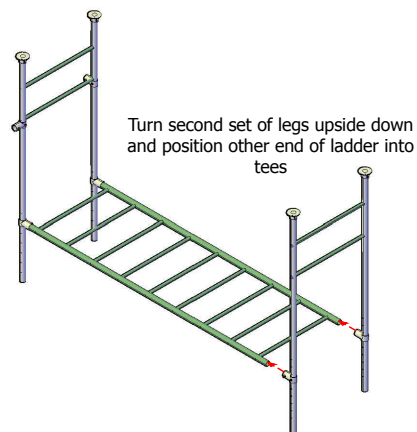


Turn second set of legs upside down and position other end of ladder into tees

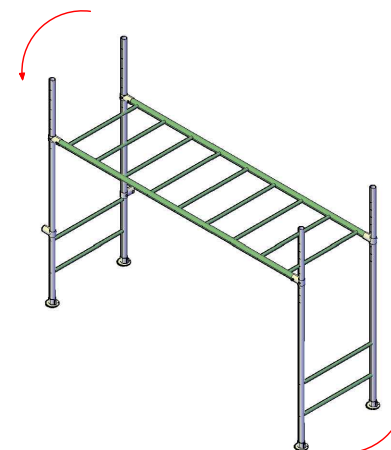


Flip the monkey bar up the right way

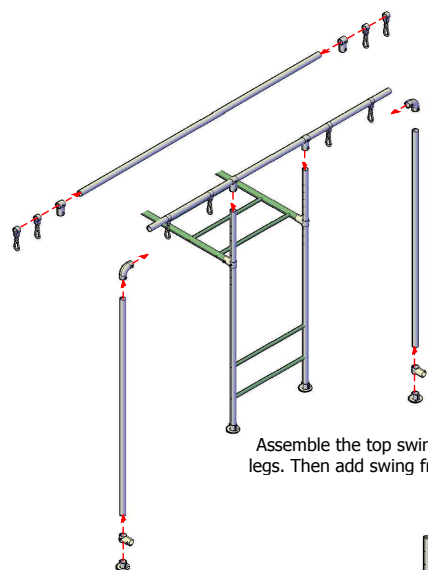

Assemble the top swing bar & insert on top of legs. Then add swing frame legs onto swing bar

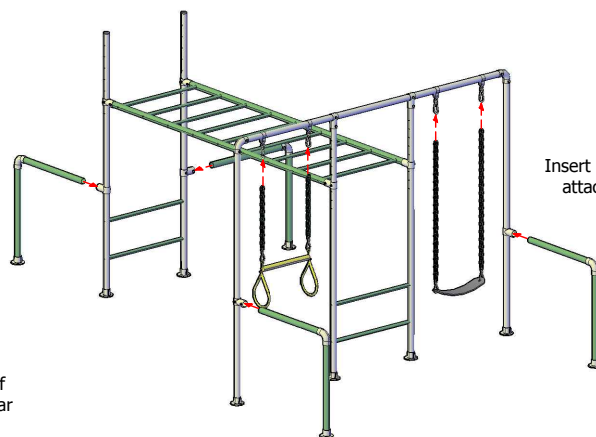

Insert twirly whirly bars and attach swing accessories

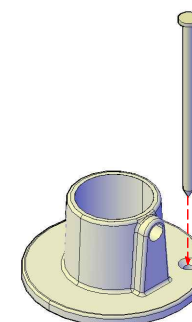

Put one peg into each foot



Apply your manufacturing sticker to a leg

Ensure your swing hooks are positioned centrally and the hex nut at the back of swing hook is done up super tight. The swing hooks should not move on this bar



Fully tighten all grub screws and then your funky monkey bar is ready for use



PHONE: 1300 912 198
OR SEE OUR VIDEO INSTRUCTIONS:
<http://www.funkymonkeybars.com/pages/videos>